
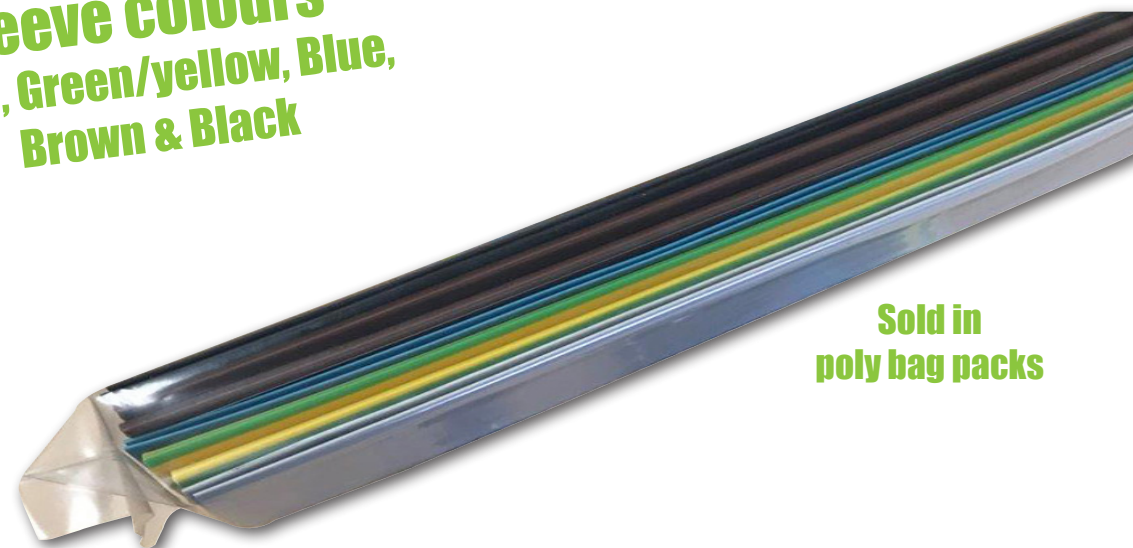


Heatshrink Sleeving

NORSLO

- + Thin wall, flame retardant, heat shrinkable tubing
- + 2.1 shrink ratio
- + Low smoke, low toxicity and halogen-free
- + Available in a wide choice of sizes

**Sleeve colours -
Grey, Green/yellow, Blue,
Brown & Black**

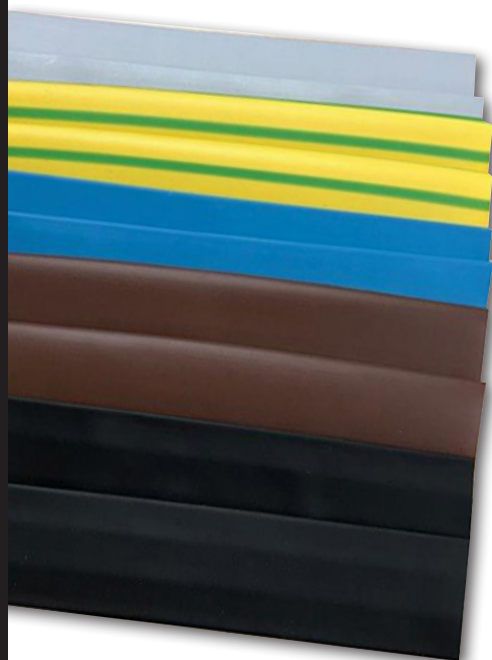

**Sold in
poly bag packs**

	HSSMCP364	HSSMCP395	HSSMCP3127	HSSMCP2191	HSSMCP2254
Dia Size (mm)	6.4	9.5	12.7	19.1	25.4
Lay Flat Width (mm)	10	15	20	30	40
Min ID Supplied (mm)	6.4	9.5	12.7	19.1	25.4
Max ID Recovered (mm)	3.2	4.7	6.4	9.5	12.7
Recovered Wall Thickness (mm)	0.65	0.65	0.65	0.77	0.89
Barcode	50127396 47505	50127396 47512	50127396 47529	50127396 47536	50127396 47543
Length	250mm	250mm	250mm	250mm	250mm
Material	Halogen-free Polyolefin				
Operating Temp	-55°C to +125°C				
Shrink Temp	90°C				
Voltage Level	300/600V				
Pack Contents	5 colours - 3 x 250mm Lengths			5 colours - 2 x-250mm Lengths	
Conforms To	UL 224				

**GREEN
BROOK**
ELECTRICAL

Tel: 01279 772 772

Fax: 01279 422 007

Email: sales@greenbrook.co.uk

www.greenbrook.co.uk

