

PLUG-IN RELAYS & BASES

- Round Footprint

- + 2 & 3 Pole - Round terminal footprint
- + With LED/Flag button as standard
- + For 35mm Din Rail



	PRR208-24AC	PRR208-24DC	PRR208-115AC	PRR208-230AC	PRRB8
Description	2 Pole Changeover 8 Pin, 24V AC	2 Pole Changeover 8 Pin, 24V DC	2 Pole Changeover 8 Pin, 115V AC	2 Pole Changeover 8 Pin, 230V DC	8 Pin Din Rail Base
Load	10A (2A Inductive) 250V AC				-
Pack Qty	5	5	5	5	10
IP Rating	IP40				-
Contact Rating	10A 250V AC				-
AC Coil Consumption	24V to 230V AC - 1.2VA				-
DC Coil Consumption	24V DC - 0.9VA				-
Contact Material	Silver Alloy				-
Guarantee	1 Year				-
Conforms To	Complies with UL / CSA				-


	PRR311-24AC	PRR311-24DC	PRR311-115AC	PRR311-230AC	PRRB11
Description	3 Pole Changeover 11 Pin, 24V AC	3 Pole Changeover 11 Pin, 24V DC	3 Pole Changeover 11 Pin, 115V AC	3 Pole Changeover 11 Pin, 230V DC	11 Pin Din Rail Base
Load	10A (2A Inductive) 250V AC				-
Pack Qty	5	5	5	5	10
IP Rating	IP40				-
Contact Rating	10A 250V AC				-
AC Coil Consumption	24V to 230V AC - 1.2VA				-
DC Coil Consumption	24V DC - 0.9VA				-
Contact Material	Silver Alloy				-
Guarantee	1 Year				-
Conforms To	Complies with UL / CSA				-

PLUG-IN RELAYS & BASES

- Round Footprint

Dimensions

2 Pole / 8 Pin Changeover & 3 Pole / 11 Pin Changeover Relays

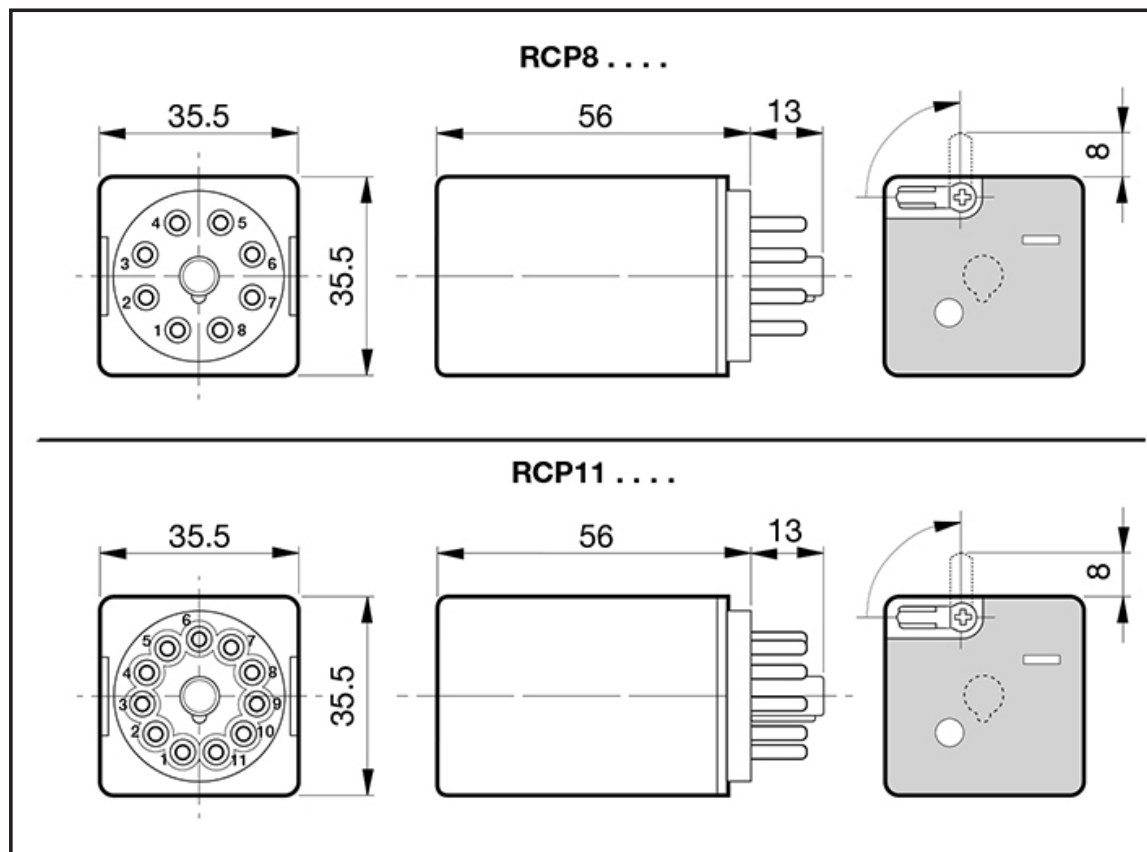

Wiring Diagram

2 Pole / 8 Pin Changeover &

3 Pole / 11 Pin Changeover Relays

